


Product information

Description

Twin Kraft is an uncoated kraft board manufactured from a blend of pre- and post-consumer waste. Its natural finish provides an authentic, organic look, while maintaining excellent strength and rigidity for dependable performance. Twin Kraft is suitable for direct food contact packaging applications where both safety and durability are essential.

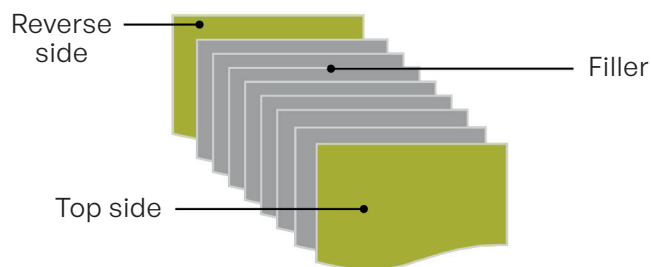

Application

Chilled/Frozen packaging • Premium brand packaging • Long shelf-life products • Food-to-go

Process suitability

Suitable for offset printing.

Specification

TECHNICAL INFORMATION

Calliper ISO 534 (mic)		430	500	590	670	780
Weight ISO 536 (gsm)		300	340	400	450	500
Stiffness L & W 5° DIN 53121 (mNm)	MD	40	60	90	105	140
	CD	12	16	26	35	45
Stiffness Taber 15° ISO 2493 (mNm)	MD	20,0	31,0	47,0	60,0	81,0
	CD	6,0	9,0	15,0	22,0	26,0

Stock schedule

MIC	430	500	590	670
GSM	300	340	400	450
720mm x 1020mm	●	●	●	●

*780mic/500gsm is also available as a mill making.

Credentials



The CO₂ emissions from this product can be mitigated through the Carbon Capture[®] programme, directly supporting the work of the Woodland Trust.

Technical information is given as an indication of typical values and is not to be considered as a commitment by the manufacturers.

This information is given for general guidance only and is subject to change without notice.