
Ensocoat™ 1S

by Stora Enso

Ensocoat 1S is a single sided SBS board produced using virgin fibres, with an exceptional white shade and smoothness for excellent print results. As a high-end graphical board, Ensocoat 1S offers the best of the best in all performance areas.

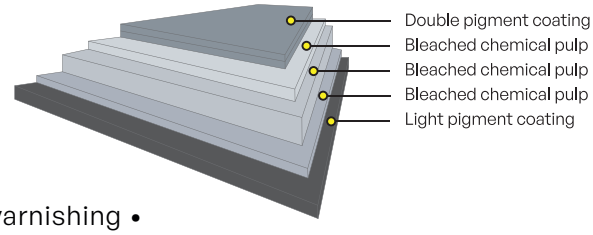

Process suitability

Litho • Letterpress • Flexo • Screen printing • UV and litho varnishing • Emulsion coating • Foil and film laminating • Embossing • Foil blocking

Suggested uses

Greeting cards • Post cards • Folders • Luxury packaging • Swing tickets

Stock schedule

mic	230	270	300	330	365	415	445	485
gsm	210	230	250	275	300	330	350	380
450 mm x 640 mm	●	●	●	●	●●	●	●	●
460 mm x 320 mm				●	●			
520 mm x 720 mm					●●	●	●	●
640 mm x 900 mm				●	●		●	●
720 mm x 1020 mm				●	●	●●	●	●

● Bulk packed ● Ream wrapped

Specification

Thickness (mic)		230	270	300	330	365	415	445	485
Grammage (gsm)		210	230	250	275	300	330	350	380
CIE Whiteness (%)		135	135	135	135	135	135	135	135
Stiffness (Taber 15°) (mNm)	MD	5.1	7.7	10.1	13	18.1	24.2	28	35.7
	CD	2.4	3.6	4.8	6.3	8.7	11.6	13	16.9

Credentials

FSC www.fsc.org FSC® C023367 The mark of responsible forestry

ECF

MADE IN EU

The CO_2 emissions from this product can be mitigated through the Carbon Capture® programme, directly supporting the work of the Woodland Trust.

This information is given for general guidance only and is subject to change without notice.